
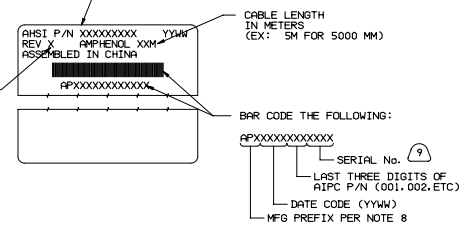
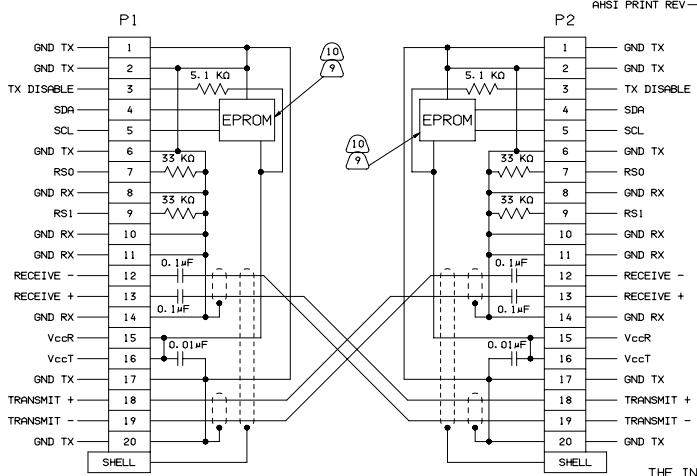
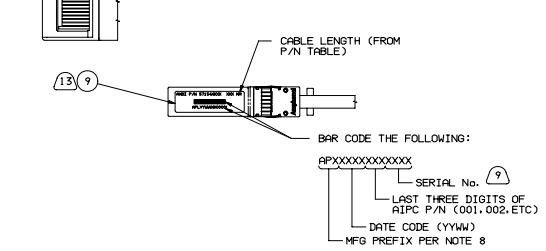


8	7	6
AMPHENOL P/N	LENGTH "A"	EQ VALUE (PASSIVE ASSYS)
571540001	500 MM ±25 MM	0000
571540002	3000 MM ±75 MM	0000
571540003	5000 MM ±125 MM	0000
571540004	7000 MM ±175 MM	0000
571540005	10000 MM ±250 MM	0000
571540006	305 MM ±15 MM	0000
571540007	1000 MM ±25 MM	0000
571540008	9000 MM ±225 MM	0000
571540009	12000 MM ±300 MM	0000
571540010	13000 MM ±325 MM	0000
571540011	15000 MM ±375 MM	0000
571540012	2000 MM ±50 MM	0000
571540013	8000 MM ±200 MM	0000

5	4	3
AIPC P/N	LENGTH "A"	EQ VALUE (PASSIVE ASSYS)
571540014	14000 MM ±350 MM	0000
571540015	10000 MM ±250 MM	0000
571540016	8500 MM ±215 MM	0000
571540017	3000 MM ±75 MM	0000
571540018	6000 MM ±150 MM	0000
571540019	4000 MM ±100 MM	0000
571540020	750 MM ±25 MM	0000
571540021	1000 MM ±25 MM	0000
571540022	2000 MM ±50 MM	0000
571540023	4000 MM ±100 MM	0000
571540024	1500 MM ±38 MM	0000
571540025	2500 MM ±62 MM	0000
571540026	3500 MM ±88 MM	0000

2	1
ZONE	REVISIONS
A	NEW RELEASE PER E.O. #24817
B	REVISED PER ECN #24822
C	REVISED PER ECN #25157
D	REVISED PER ECN #25422
E	REVISED PER ECN #25491
F	REVISED PER ECN #25603
G	REVISED PER ECN #25658
H	REVISED PER ECN #300153
J	REVISED PER ECN #300310
K	REVISED PER ECN #300480
L	REVISED PER ECN #301405
M	REVISED PER ECN #301410
N	REVISED PER ECN #302549
P	REVISED PER ECN #302583
R	REVISED PER ECN #302626
S	REVISED PER ECN #302875
T	REVISED PER ECN #303614
U	REVISED PER ECN #303689
V	REVISED PER ECN #303775
W	REVISED PER ECN #304457

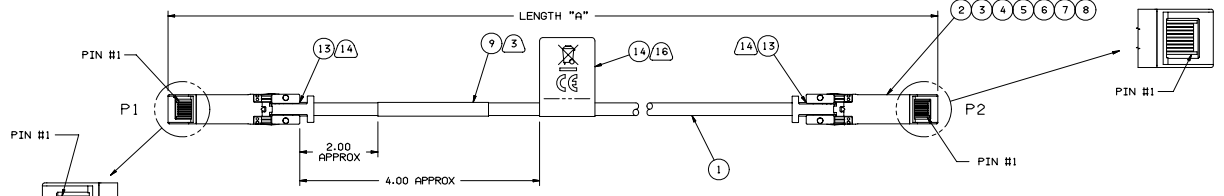

- ALL MATERIALS USED IN THE MANUFACTURE OF THIS ASSEMBLY SHALL COMPLY WITH AMPHENOL REGULATED MATERIALS SPECIFICATION CS-1152.
- POT MOLD BOTH CABLE ENDS PER MFG PROCESS. A SECONDARY POT MOLD SHALL BE ADDED TO COVER CABLE TERMINATION AREAS.
- CAUTION: ANTI-STATIC CONTROL MEASURES MUST BE OBSERVED DURING THE MANUFACTURE OF THIS ASSEMBLY.
- EPROM PROGRAM PER AMPHENOL SPEC CS-1154. EPROM SERIAL No. MUST MATCH CABLE LABEL SERIAL No.
- MARK LABEL WITH SERIAL NUMBER. MEXICO LOCATION PREFIX IS "APE"; ENDICOTT LOCATION PREFIX IS "APL"; CHINA LOCATION PREFIX IS "APF".
- INSTALL DUST COVER OVER APPLICABLE CONNECTOR PER MFG PROCESS PRIOR TO SHIPMENT TO CUSTOMER.
- PACKAGE COMPLETED ASSY IN AN APPROPRIATELY SIZED ANTI-STATIC BAG.
- THIS DRAWING IS SIMILAR TO AMPHENOL DWG 56646XXXX.
- UL LABEL MUST BE ON THE SHIPPING CARTON PER SUBJECT 764 OF THE UL COMPONENT WIRING HARNESSES (ZPF#2) FILE #86140. CSA LABEL MUST BE ON SHIPPING CARTON.
- A PRE-PRINTED LABEL WITH THE INFORMATION SHOWN IN THE LABEL DETAIL IS POSITIONED WITHIN THE INDICATED AREA ON THE CABLE ASSEMBLY.
- TEST COMPLETED ASSEMBLIES PER AMPHENOL CS-1155. TEST ASSEMBLIES AT 10.3125 Ohm.
- THIS DRAWING IS RESERVED FOR AMPHENOL STANDARD PRODUCT.

- PERMANENTLY MARK LABEL WITH "MEE" LOG AND "CEC" LOGO. REF AHSI SPEC CS-1210. A ROHS2 CERTIFICATE OF COMPLIANCE MUST BE INCLUDED IN EACH SHIPPING CARTON.
- SOLDER PER AMPHENOL CS-1186 (LEAD FREE SOLDER).
- WRAP ONE TURN OF COPPER TAPE AROUND CABLE JACKET END BEFORE PULLING BACK BRAID.
- PERMANENTLY AFFIX LABEL ON CONNECTOR APPROX AS SHOWN. PERMANENTLY MARK WITH INDICATED TEXT. DO NOT USE WRAPPED LABEL ON THESE ASSEMBLIES.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL INTERCONNECT PRODUCTS CORPORATION. ANY REPRODUCTION OR DISCLOSURE, TO THIRD PARTIES, IN PART OR WHOLE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL INTERCONNECT PRODUCTS CORPORATION IS PROHIBITED.

NOTES: UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTION    DECIMAL    ANGLE 	EAR NO. SIGNATURES    DATE DRAWN D. CASHIMERE    9/07 CHECKED APPROVED APPROVED	<b>Amphenol Interconnect Products</b> CBL ASSY, 10GbE, SFP+ TO SFP+, 100G, RoHS SIZE D    57154XXXX    REV W SCALE: NONE    SHEET 1 OF 1
---	--	---

